
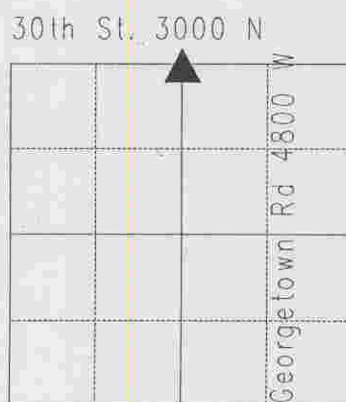


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 30 TOWNSHIP 16 RANGE 3
DATE: -7-26-01 8-29-06
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-18-99

IN. S.P.C. E ZONE NAD '83
NAME: 16033002
N: 506502.8740(m)
E: 50512.6040(m)

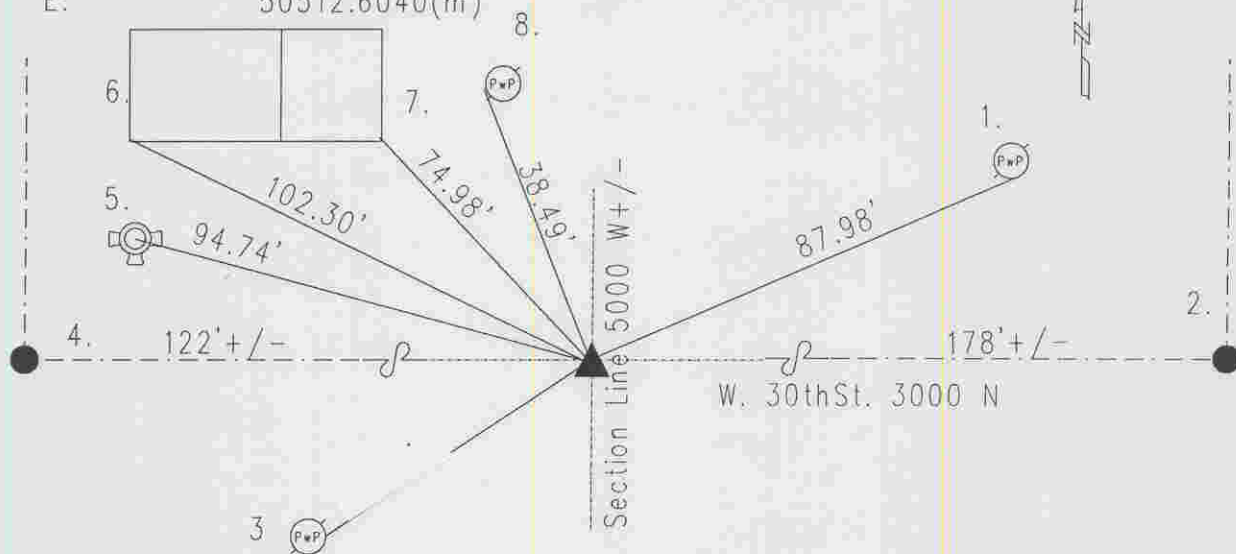

Original post set 1820 by Wm. B. Laughlin with witnesses: 12" sugar S 35 E 13 links, 14" beech N 37 E 7 links per Marion County Atlas pg. 7. Survey by H. B. Fatout 5-10-1882 indicates the corner set no witness per Wayne Township Legal Survey Book pg. 97. Thompson 3-4-47 called an iron pin found. G.W.S. 7-20-62 called a stone. Miller 12-29-75 called a chiselled hole in concrete. Gries 1-14-88 called a chiselled hole in concrete. Wilcoxen 7-18-99 called a chiselled hole in concrete. Corner excavated by Wilcoxen 7-26-01 and a chiselled hole in concrete was found 4" down. No other points were found. Harrison set.

16033002

| REF. | DISTANCE | DESCRIPTION |
|------|----------|--|
| 1. | 87.98' | Mag nail w/brass wash SE PwP#437-427 A 8"up |
| 2. | 178' +/- | Due E to Auburn St. |
| 3. | 44.35' | PK nail w/brass washer E PwP#17-426 B 8"up |
| 4. | 122' +/- | Due W to Fuller Rd |
| 5. | 94.74' | Top nut of fire hydrant |
| 6. | 102.30' | SW corner of ADDRESS 5016 |
| 7. | 74.98' | SE corner of ADDRESS 5016 |
| 8. | 38.49' | Mag nail w/brass washer W PwP#362-427 A 8"up |
| | | |
| | | |